


K8i




COMBI FOLDING MACHINES

Technical specifications

COMBI FOLDING MACHINES



K8i



TECHNICAL SPECIFICATIONS		K8i	
		mm	inch
Pile height palletized feeder		1,300	51
Format width	min.	297	11 1/2
	max.	820	32 1/4
Format length	min.	420	16 1/2
	max.	1,200	47 1/4
Smallest Folding length		60	2 3/8
Buckle plates		4 or 6	
Fold roller diameter		44	1 3/4
Slitter shaft diameter		35	1 3/8
Product thickness parallel fold	max.	1.5	1/16
Product thickness cross fold	max.	2.5	3/32
Product thickness three fold	max.	3	1/8
Speed	min.	30 m/min	
	max.	250 m/min optional 280 m/min	
Electrical connected load	3 x 400 V/50 Hz	9.3 kVA max. 63 A	
Air consumption		16 m ³ /h	

TECHNICAL DRAWING Floorplan K8i

Measurements: mm
inch

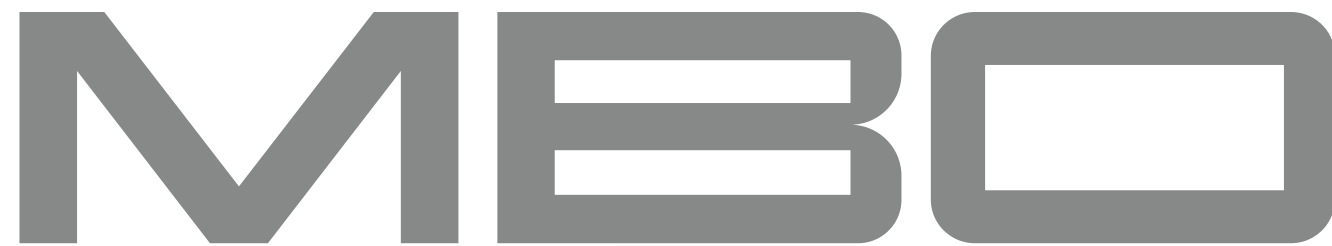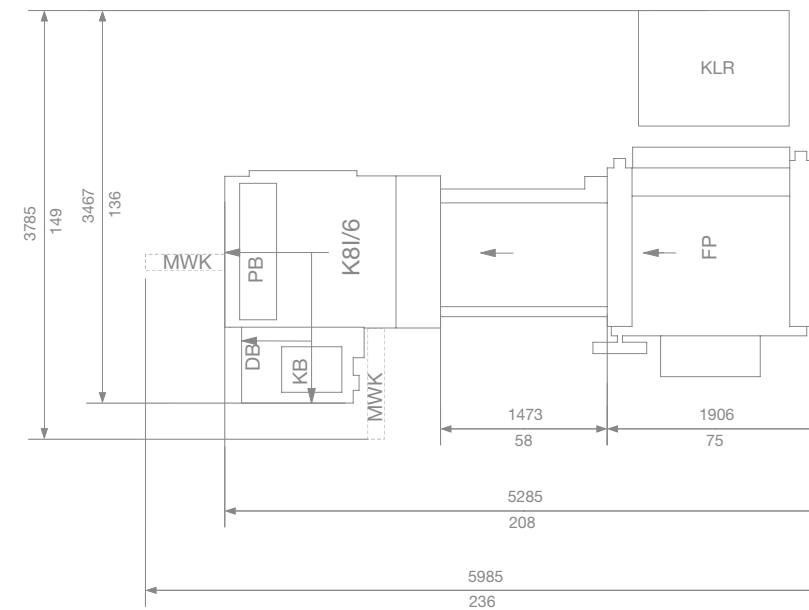

MBO Postpress Solutions GmbH
Grabenstrasse 4-6 / 71570 Oppenweiler / Germany
Phone +49 (0) 7191 46-0 / www.mbo-pps.com

Your contact partner

INFO@MBO-PPS.COM

